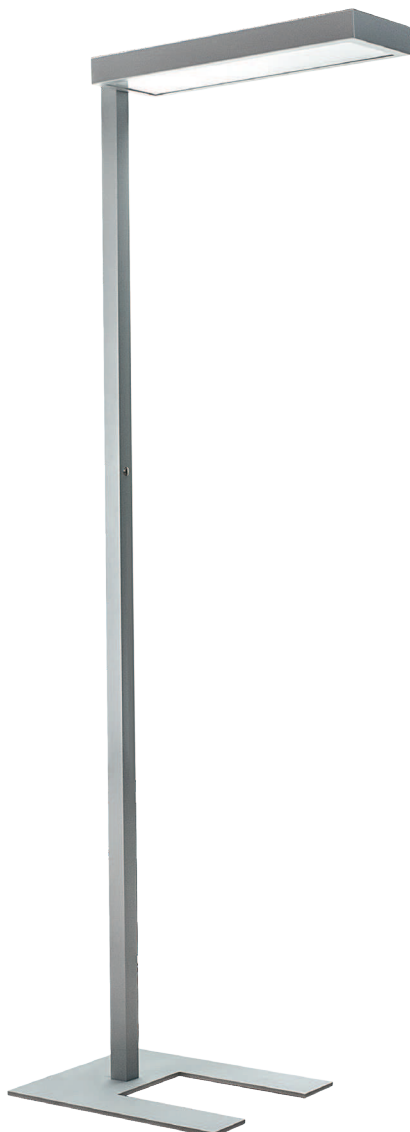


OFFICE LED SLIM


Free standing floor LED luminaire with direct or direct / indirect lighting.

Mounting:	Free standing
Body material:	Steel and aluminium
Colour:	Standard Gray 9006, other RAL colours on request (please add RAL code after index number)
LED module:	Philips / Osram or Tridonic LED modules included
Colour temperature:	3000K or 4000K
Colour Rendering Index (CRI)	>80 in standard, other on request
Driver:	Electronic driver in standard, DALI on request
Emergency unit:	on request - Standard or DALI 3 hour emergency unit
Movement sensor:	on request
Daylight control sensor:	on request
Operating temperature range:	0°C ... +40°C
IP Class:	IP20 in standard, IP44 on request
Power:	220-240V 50/60Hz
Lighting direction:	Direct index nr. 6591.XXXX or Direct / indirect - index nr. 6591.UD.XXXX
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	Microprismatic [MPR] in standard, white acrylic diffuser [WD], acrylic frosted [AC] or any other diffuser on request
General data:	5 Years standard warranty UGR<19 diffuser on request Different lumen output or wattage available on request All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used

 IP20 220-240 V
50-60 Hz


Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
6591.4400/830	4400	29	3000	Ra > 80	50.000	5	3	15,00
6591.4400/840	4400	29	4000	Ra > 80	50.000	5	3	15,00
UP/DN								15,00
6591.UD.8800/830	8800	57	3000	Ra > 80	50.000	5	3	15,00
6591.UD.8800/840	8800	57	4000	Ra > 80	50.000	5	3	15,00

