

## LED Panel





### LED Panel (600 x 600mm)

- Mounting:** Recessed LED panel
- Body material:** Powder coated aluminium
- Colour:** RAL 9016
- LED module:** High quality LED chips
- Colour temperature:** 4000K
- Colour Rendering Index (CRI):** >80 in standard
- Driver:** Electronic driver in standard DALI on request
- Emergency unit:** On request - Standard or DALI 3 hour emergency unit
- Movement sensor:** On request
- Daylight control sensor:** On request
- Operating temperature range:** -20°C ... +40°C
- IP Class:** IP44
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct lighting - index 35 | 3/4227/35 | 4/35 | 5 , direct / indirect - index 6608/6609/6610/6611
- Reflector type:** N/A
- Light distribution:** Symmetric
- Diffuser:** Polycarbonate
- General data:** 5 Years standard warranty  
100° beam angle  
UGR 19  
Different lumen output or wattage available on request



Index no.	Lumen output (lm)	Power (W)	Colour temp (K)	CRI	Lifetime (H)	Warranty (Years)	MacAdam (SDCM)	Weight (kg)
XXXXXX	3600	40	4000K	Ra > 80	30,000	3	2835	XX

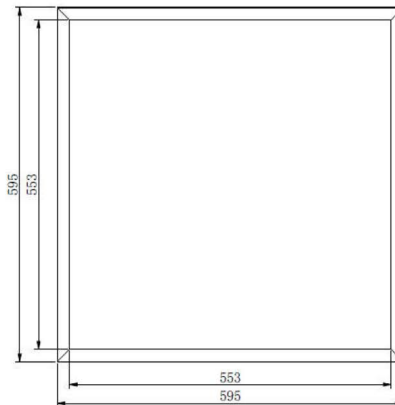

Different lumen output or wattage available on request

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our price list

Wattage of products may vary due to constant LED efficacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used.