


INFINITY

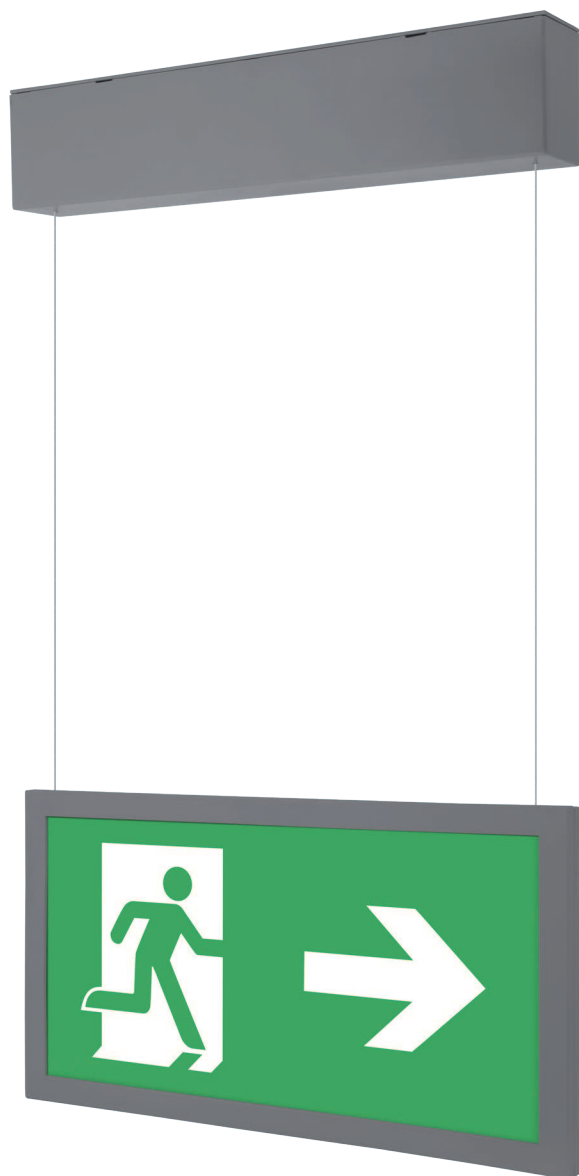

Emergency exit sign, body made of white or gray polycarbonate with sign made of plexiglass.

- Battery charging indication by LED
- Electronic protection against total battery discharge
- Self-test function (optional)
- Operation in emergency or mains and emergency mode available
- Using to central battery available
- Surface assembly, optional recessed
- The luminaire can be powered maintained or non maintained

- Mounting:** Surface (ceiling, rope sling)
Optionally recessed (ceiling**)
- Power supply:** Self contained - 220 - 240VAC/50 - 60Hz
Central battery - 220 - 240VAC/50 - 60Hz; 176 - 275VDC
Central battery FZLV - 24VDC
- Light source:** 1W, 2W LED
- Charging:** STANDARD: max. 24h
PREMIUM: max. 12h; energy-saving electronic charger
- Autonomy and batteries:** STANDARD: 1h or 3h, Ni-Cd 3,6V batteries
PREMIUM: 1h or 3h, LiFePO4 6,4V batteries
- Insulation class:** II or III
- IP rating:** IP44
- Viewing distance:** 30m
- Ambient temperature:** ta: 0°C÷40°C



Index no.	Description	Power [W]	Lifetime [H]
004579.1H	maintained 1 h emergency	1,2	50.000
004579.3H	maintained 3 h emergency	1,2	50.000
004579.1H/AT	maintained 1 h emergency with autotest	1,2	50.000
004579.3H/AT	maintained 3 h emergency with autotest	1,2	50.000

